




Applications of Mascoat Marine - DTM Thermal Insulating Coating

The pictures below are just a small number of the applications that can benefit with the use of Mascoat Marine-DTM. All applications use the coating for thermal protection and/or anti-condensation. The coating is normally applied no greater than 2.0 mm (80 mils) in 0.5 mm coats (20 mils). The colder environments (below 5°C) normally receive 1.5-2.00 mm (60-80) mils.

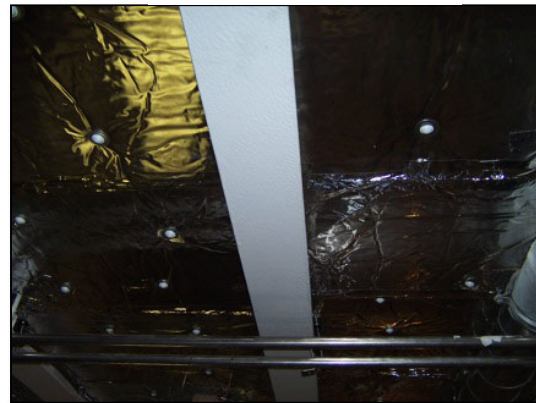

Mascoat Marine-DTM applied to the outside wall of the vessel and framing supports to combat condensation/sweating. The coating is normally applied to 40-80 mils (1.0-2.0 mm) in a series of coats. By applying the coating to the side walls, stiffeners, overheads and shells of the vessel, protection is given as well as reducing radiant heat gain.



For more information or a quote contact Redjak on 07 3219 2550
or visit www.redjak.com.au or www.mascoataustralia.com

QUEENSLAND • NORTHERN TERRITORY • NEW SOUTH WALES • ACT

The information above is a Mascoat® example of how Mascoat Marine Coatings can be applied. RedJak make no claims to having performed this particular job.